

# SKINDICHT® SHZ Cable Clamp




## Compact Strain Relief Cable Gland with Single Saddle Clamp and Additional Sealing

The SKINDICHT® SHZ cable clamp is a compact strain relief cable gland constructed of corrosion resistant nickel-plated brass. It is equipped with an extension fitting to reach protection class IP55. Additional sealing is achieved by the use of an adjustable, multi-layered bushing and an o-ring on the mounting threads.

### Application Advantage:

- Durable, compact and corrosion resistant cable clamp
- Strain relief is attained by use of a specially formed nickel-plated brass bracket
- Excellent in harsh environment applications including exposure to seawater and chemicals

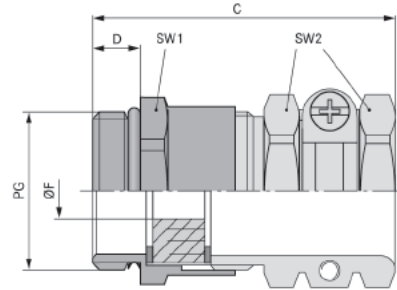

### Technical Data:

Materials:		Seal:	IP 55
Body:	Nickel-Plated Brass	Temperature:	-20° C to +80° C
Bushing:	CR	Locknuts:	Add SM Locknuts, see Page 522
O-ring:	Perbunan (NBR)		

### SKINDICHT® SHZ: Compact Strain Relief Cable Gland with PG Threads

Part Number	Thread Type & Size	Clamping Range ØF inches	SW 1/2 Wrenching Flats inches	C Overall Length inches	D Thread Length inches	Max. Installation Diameter inches	Standard Pack Size
52005590	PG-7	0.197 - 0.236	.55/.59	1.181	.197	0.827	50
52005600	PG-9	0.295 - 0.335	.67/.67	1.339	.236	0.984	50
52000930	PG-11	0.374 - 0.472	.79/.79	1.378	.236	1.102	25
52000940	PG-13	0.492 - 0.551	.87/.87	1.575	.256	1.260	25
52000950	PG-16	0.531 - 0.630	.94/.94	1.654	.256	1.378	25
52000960	PG-21	0.610 - 0.827	1.18/1.18	1.850	.276	1.811	25
52000970	PG-29	0.846 - 1.083	1.57/1.61	2.087	.315	2.283	10
52000980	PG-36	1.063 - 1.339	1.97/1.97	2.402	.354	2.756	10
52005610	PG-42	1.339 - 1.693	2.24/2.24	2.598	.394	3.071	5
52005620	PG-48	1.496 - 1.890	2.52/2.52	2.677	.394	3.386	5

### SKINDICHT® SHZ-M: Compact Strain Relief Cable Gland with Metric Threads

Part Number	Thread Type & Size	Inner Thread	Clamping Range ØF inches	SW 1/2 Wrenching Flats inches	C Overall Length inches	D Thread Length inches	Max. Installation Diameter inches	Standard Pack Size
52106700	M-12X1.5	PG 7	0.217 - 0.256	.55/.59	1.181	.197	0.827	50
52106710	M-16X1.5	PG 9	0.197 - 0.315	.71/.67	1.299	.197	0.984	50
52106720	M-20X1.5	PG 11	0.315 - 0.472	.87/.79	1.378	.236	1.102	25
52106730	M-20X1.5	PG 13	0.335 - 0.512	.87/.87	1.555	.236	1.260	25
52106740	M-20X1.5	PG 16	0.315 - 0.591	.94/.94	1.634	.236	1.378	25
52106750	M-25X1.5	PG 21	0.551 - 0.760	1.18/1.18	1.850	.276	1.811	25
52106760	M-32X1.5	PG 29	0.748 - 1.063	1.57/1.61	2.087	.315	2.283	10
52106770	M-40X1.5	PG 36	1.063 - 1.339	1.97/1.97	2.362	.315	2.756	10
52106780	M-50X1.5	PG 42	1.378 - 1.693	2.24/2.24	2.559	.354	3.071	5
52106790	M-63X1.5	PG 48	1.575 - 1.890	2.60/2.52	2.677	.394	3.386	5