

# SKINDICHT® SR Series Cable Clamp




Compact Strain Relief Cable Gland with PG & Metric Threads with Single Saddle Clamp and Special Neoprene Bushing

The SKINDICHT® SR Series cable clamp is a compact, strain relief cable gland constructed of corrosion resistant nickel-plated brass. Strain relief is achieved by use of specially formed nickel-plated brass saddle clamps and a full length Neoprene bushing that protects the cable from over-stress and conductor breakage while providing an effective and durable seal.

#### Application Advantage:

- The neoprene bushing provides both a seal and high bend protection
- Strain relief is achieved through the specially formed saddle clamps

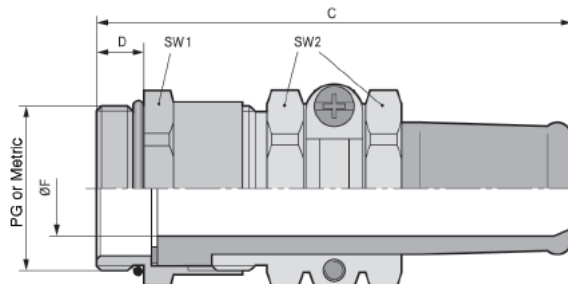

## Technical Data:



Materials:

Body: Nickel-Plated Brass  
Saddle Clamp: Nickel-Plated Brass  
Screws & Bracket: Nickel-Plated Brass  
O-Ring: Perbunan (NBR)



Temperature:

-20° C to +80° C



Seal:

IP 65

Locknuts:

Add SM Locknuts, see Page 522

Antikink Protection:

PG: CR  
Metric: CR/NBR

# SKINDICHT® SR Series Cable Clamp



Compact Strain Relief Cable Gland with PG & Metric Threads  
with Single Saddle Clamp and Special Neoprene Bushing

## SKINDICHT® SR: PG Metallic Cable Clamp

Part Number	Thread Type & Size	Inner Thread	Clamping Range øF inches	Wrenching Flats inches		C Overall Length inches	D Thread Length inches	Max. Installation Diameter inches	Standard Pack Size
				SW 1	SW 2				
52000990	PG-7	PG-5	0.138 - 0.197	0.55	0.59	1.968	.197	0.91	50
52001000	PG-9	PG-7	0.217 - 0.276	0.67	0.67	2.039	.236	0.98	50
52001010	PG-11	PG-7	0.217 - 0.276	0.79	0.79	2.165	.236	1.10	25
52001020	PG-11	PG-9	0.295 - 0.354	0.79	0.79	2.165	.236	1.10	25
52001030	PG-13	PG-9	0.295 - 0.354	0.87	0.87	2.362	.256	1.26	25
52001040	PG-13	PG-11	0.354 - 0.433	0.87	0.87	2.362	.256	1.26	25
52001050	PG-13	PG-13	0.433 - 0.512	0.87	0.87	2.362	.256	1.26	25
52001060	PG-16	PG-13	0.453 - 0.512	0.94	0.94	2.559	.256	1.38	25
52001070	PG-16	PG-15	0.512 - 0.591	0.94	0.94	2.559	.256	1.38	25
52001080	PG-21	PG-15	0.531 - 0.591	1.18	1.18	3.071	.276	1.81	25
52001090	PG-21	PG-17	0.591 - 0.669	1.18	1.18	3.071	.276	1.81	25
52001100	PG-21	PG-19	0.669 - 0.748	1.18	1.18	3.071	.276	1.81	25
52001110	PG-21	PG-20	0.709 - 0.787	1.18	1.18	3.071	.276	1.81	25
52001120	PG-29	PG-20	0.709 - 0.787	1.57	1.61	3.543	.315	2.32	10
52001130	PG-29	PG-23	0.827 - 0.906	1.57	1.61	3.543	.315	2.32	10
52001140	PG-29	PG-25	0.906 - 0.984	1.57	1.61	3.543	.315	2.32	10
52001150	PG-36	PG-26	0.906 - 1.024	1.97	1.97	4.291	.354	2.76	5
52001160	PG-36	PG-30	1.063 - 1.181	1.97	1.97	4.291	.354	2.76	5
52001170	PG-36	PG-33	1.181 - 1.299	1.97	1.97	4.291	.354	2.76	5
52001180	PG-36	PG-35	1.260 - 1.378	2.24	1.97	4.291	.354	2.76	5
52001190	PG-42	PG-35	1.260 - 1.378	2.24	2.24	4.448	.394	2.95	5
52001200	PG-42	PG-38	1.378 - 1.496	2.24	2.24	4.448	.394	2.95	5
52001210	PG-42	PG-40	1.417 - 1.575	2.24	2.24	4.448	.394	2.95	5
52001220	PG-48	PG-40	1.417 - 1.575	2.52	2.52	4.645	.394	3.27	1
52001230	PG-48	PG-44	1.575 - 1.732	2.52	2.52	4.645	.394	3.27	1

## SKINDICHT® SR-M: Metric Metallic Cable Clamp

Part Number	Thread Type & Size x 1.5	Inner Thread	Clear Opening Seal	Clamping Range øF inches	Wrenching Flats inches		C Overall Length inches	D Thread Length inches	Max. Installation Diameter inches	Standard Pack Size
					SW 1	SW 2				
52106410	M-12	PG-7	0.20	0.157 - 0.197	0.55	0.59	1.929	.197	0.91	50
52106420	M-16	PG-9	0.28	0.217 - 0.276	0.71	0.67	1.969	.197	0.98	50
52106430	M-20	PG-11	0.28	0.217 - 0.276	0.87	0.79	2.165	.236	1.10	25
52106440	M-20	PG-11	0.35	0.295 - 0.354	0.87	0.79	2.165	.236	1.10	25
52106450	M-20	PG-13	0.35	0.295 - 0.354	0.87	0.87	2.362	.236	1.26	25
52106460	M-20	PG-13	0.43	0.354 - 0.433	0.87	0.87	2.362	.236	1.26	25
52106470	M-20	PG-13	0.51	0.433 - 0.512	0.87	0.87	2.362	.236	1.26	25
52106480	M-20	PG-16	0.51	0.472 - 0.512	0.94	0.94	2.559	.236	1.38	25
52106481	M-20	PG-16	0.59	0.512 - 0.591	0.94	0.94	2.598	.236	1.38	25
52106490	M-25	PG-21	0.59	0.492 - 0.591	1.18	1.18	3.091	.276	1.81	25
52106500	M-25	PG-21	0.67	0.551 - 0.669	1.18	1.18	3.091	.276	1.81	25
52106510	M-25	PG-21	0.75	0.669 - 0.748	1.18	1.18	3.091	.276	1.81	25
52106520	M-25	PG-21	0.79	0.669 - 0.787	1.18	1.18	3.091	.276	1.81	25
52106530	M-32	PG-29	0.79	0.748 - 0.787	1.57	1.61	3.563	.315	2.32	10
52106540	M-32	PG-29	0.91	0.866 - 0.906	1.57	1.61	3.563	.315	2.32	10
52106550	M-32	PG-29	0.98	0.906 - 0.984	1.57	1.61	3.563	.315	2.32	10
52106560	M-40	PG-36	1.02	0.945 - 1.024	1.97	1.97	4.252	.315	2.76	5
52106570	M-40	PG-36	1.18	1.102 - 1.181	1.97	1.97	4.252	.315	2.76	5
52106580	M-40	PG-36	1.30	1.220 - 1.299	1.97	1.97	4.252	.315	2.76	5
52106590	M-40	PG-36	1.38	1.299 - 1.358	1.97	1.97	4.252	.315	2.76	5
52106600	M-50	PG-42	1.38	1.220 - 1.358	2.24	2.24	4.370	.354	2.95	5
52106610	M-50	PG-42	1.50	1.260 - 1.496	2.24	2.24	4.370	.354	2.95	5
52106620	M-50	PG-42	1.57	1.457 - 1.575	2.24	2.24	4.370	.354	2.95	5
52106630	M-63	PG-48	1.57	1.260 - 1.575	2.60	2.52	4.646	.394	3.27	1
52106640	M-63	PG-48	1.73	1.417 - 1.732	2.60	2.52	4.646	.394	3.27	1