


## SKINDICHT® SH Cable Clamp

Nickel-Plated Brass Cable Clamp with Single Saddle Clamp and PG Thread

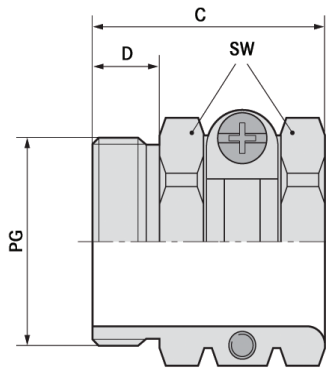

The SKINDICHT® SH cable clamp is an extremely durable compact strain relief cable gland constructed of corrosion-resistant nickel-plated brass. Strain relief is achieved by use of a specially formed nickel-plated brass bracket that provides a secure locking system.

#### Application Advantage

- Durable, compact, and corrosion-resistant cable clamp
- Excellent in harsh environment applications including exposure to seawater and chemicals
- Cost-effective strain relief solution

#### Approvals



#### Technical Data

<b>Material:</b>		<b>Temperature Range:</b>	-20°C to +200°C
- Body:	Nickel-plated brass	<b>IP Protection:</b>	IP20
<b>Locknuts:</b>	Add SM locknuts, page 545		

Part Number	Thread Type & Size	øF Clamping Range		SW Wrenching Flats	C Overall Length	D Thread Length	Max. Installation Diameter	Standard Pack Size
		(inches)	(mm)	(inches)	(inches)	(inches)	(inches)	
<b>SKINDICHT® SH</b>								
52000830	PG 7	0.315 - 0.394	8.0 - 10.0	0.591	0.689	0.216	0.866	50
52000840	PG 9	0.394 - 0.492	10.0 - 12.5	0.669	0.807	0.236	0.985	50
52000850	PG 11	0.433 - 0.591	11.0 - 15.0	0.788	0.847	0.236	1.103	50
52000860	PG 13	0.551 - 0.650	14.0 - 16.5	0.866	0.945	0.295	1.260	25
52000870	PG 16	0.591 - 0.709	15.0 - 18.0	0.945	1.024	0.295	1.379	25
52000880	PG 21	0.709 - 0.925	18.0 - 23.5	1.182	1.142	0.315	1.812	25
52000890	PG 29	0.906 - 1.221	23.0 - 31.0	1.615	1.300	0.315	2.285	10
52000900	PG 36	1.142 - 1.595	29.0 - 40.5	1.970	1.438	0.374	2.758	10
52000910	PG 42	1.339 - 1.773	34.0 - 45.0	2.245	1.497	0.394	3.073	5
52000920	PG 48	1.536 - 1.970	39.0 - 50.0	2.521	1.556	0.453	3.388	5

Photographs are not to scale and are not true representations of the products in question.  
For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.