


SKINTOP® ST-HF-M

Halogen-Free Strain Relief with Metric Thread

Complete the Installation



SKINTOP®
GMP-HF:
page 544

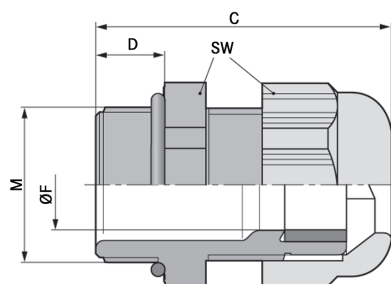

SKINTOP® ST-HF-M is an easy-to-assemble, halogen-free, metric cable gland for use when personal and property protection is a priority such as public buildings, underground railways, mass transportation systems, ventilation systems, and industrial plants.

Approvals



Application Advantage

- Completely halogen-free providing safe LSZH performance
- Extremely flame-retardant and self-extinguishing with no dripping
- The heavy duty SKINTOP® design provides great pullout strength and very reliable strain relief
- Superior integrated locking mechanism includes an internal ratchet for vibration-proof protection
- Multi-trapezoidal thread requires just one twist to tighten

Technical Data

Material: - Body: - Bushing: - O-ring:	Halogen-free polyamide, V-0 per UL 94	Color: Light gray (RAL 7035)
	Halogen-free	Protection: IP68, 5 bar (Exceeds NEMA 6/6P pressure rating)
	Halogen-free	
Temperature Range: -20°C to +100°C		

Part Number	Thread Type & Size	øF Clamping Range (inches) (mm)		SW Wrenching Flats (inches)	C Overall Length (inches)	D Thread Length (inches)	Standard Pack Size
SKINTOP® ST-HF-M: Standard							
53111407	M12 x 1.5	0.157 - 0.216	4.0 - 5.5	0.591	1.182	0.315	100
53111417	M16 x 1.5	0.177 - 0.354	4.5 - 9.0	0.748	1.339	0.315	100
53111427	M20 x 1.5	0.275 - 0.512	7.0 - 13.0	0.985	1.457	0.354	100
53111437	M25 x 1.5	0.354 - 0.669	9.0 - 17.0	1.182	1.576	0.394	50
53111447	M32 x 1.5	0.433 - 0.827	11.0 - 21.0	1.418	1.851	0.394	25
53111457	M40 x 1.5	0.748 - 1.103	19.0 - 28.0	1.812	2.048	0.394	10
53111467	M50 x 1.5	1.063 - 1.379	27.0 - 35.0	2.167	2.442	0.472	5
53111477	M63 x 1.5	1.339 - 1.773	34.0 - 45.0	2.600	2.797	0.472	5

Photographs are not to scale and are not true representations of the products in question.

For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.